

## LED Intelligent Driver (constant voltage)

- Small size and light weight. The housing is made from V0 flame retardant PC materials that SAMSUNG/COVESTRO uses.
- The clamshell design and screwless type for strain-relief. The design of dismountable end cap allows you to adjust the length of housing depending on your needs.
- Automatically recognize 0-10V and 1-10V input signals.
- Ultra-low consumption of 0-10V ports < 0.05mA.
- Dimming range: 0~100%, LED dimming starts at 0.1%.
- With soft-on and fade-in function, bring more comfortable visual experiences.
- High-performance drivers: Efficiency 93%, PF>0.98, THD<6%.
- Dimming interfaces have photoelectric isolation that are compliant with the latest safety standards and more secure and reliable.
- Comply with the ERP directive of EU energy efficiency, stand-by power consumption 0.5W.
- Innovative thermal management technology, has intelligent protection of driver lifetime.
- Over-heat / Over voltage / Over load / Short circuit protection, recover automatically.
- The design of dismountable end covers is for convenient adjustments of length of drivers.
- Suitable for lamp applications of indoor I / II / III types.
- Up to 50,000-hour life time.
- 5 years warranty (Rubycon Capacitor).

5 in 1 dimming

0-10V  
1-10V  
10V PWM  
RX  
Push DIM

Ultra-low consumption of 0-10V ports: &lt; 0.05mA.

Flicker-free

IEEE 1789

Dimmable:

0.1%-100%




## Technical Specs

| Model        |                               | LM-150-24-G1A2                                                                                                             |                  | LM-150-12-G1A2                                                                                          |  |
|--------------|-------------------------------|----------------------------------------------------------------------------------------------------------------------------|------------------|---------------------------------------------------------------------------------------------------------|--|
| OUTPUT       | Output Voltage                | 24Vdc                                                                                                                      |                  | 12Vdc                                                                                                   |  |
|              | Output Voltage Range          | 24Vdc $\pm$ 0.5Vdc                                                                                                         |                  | 12Vdc $\pm$ 0.5Vdc                                                                                      |  |
|              | Output Current                | Max. 6.25A                                                                                                                 |                  | Max. 12.5A                                                                                              |  |
|              | Output Power                  | Max. 150W                                                                                                                  |                  |                                                                                                         |  |
|              | Output Power Range            | 0~150W                                                                                                                     |                  |                                                                                                         |  |
|              | Strobe Level                  | High frequency exemption level                                                                                             |                  |                                                                                                         |  |
|              | Dimming Range                 | 0~100%, down to 0.1%                                                                                                       |                  |                                                                                                         |  |
|              | Overload Power Limitation     | $\geq 102\%$                                                                                                               |                  |                                                                                                         |  |
|              | Ripple                        | Switch ripple $\leq$ 200mV, noise $\leq$ 500mV                                                                             |                  | Switch ripple $\leq$ 200mV, noise $\leq$ 800mV                                                          |  |
|              | PWM frequency                 | 3600Hz                                                                                                                     |                  |                                                                                                         |  |
| INPUT        | Dimming Interface             | 0-10V(1-10V/10V PWM/RX), Push DIM                                                                                          |                  |                                                                                                         |  |
|              | Input Voltage                 | 220-240Vac 200-280Vdc                                                                                                      |                  |                                                                                                         |  |
|              | Frequency                     | 50/60Hz                                                                                                                    |                  |                                                                                                         |  |
|              | Input Current                 | $\leq 0.75A/230Vac$                                                                                                        |                  |                                                                                                         |  |
|              | Power Factor                  | PF>0.98/230Vac [at full load]                                                                                              |                  |                                                                                                         |  |
|              | THD                           | THD<6% $\text{\textcircled{230Vac}}$ [at full load]                                                                        |                  |                                                                                                         |  |
|              | Efficiency (typ.)             | 93%                                                                                                                        |                  | 92%                                                                                                     |  |
|              | Standby Power Loss            | 0.5W                                                                                                                       |                  |                                                                                                         |  |
|              | Inrush Current                | Cold start 45A/230Vac                                                                                                      |                  |                                                                                                         |  |
| ENVIRONMENT  | Anti Surge                    | L-N: 2KV                                                                                                                   |                  |                                                                                                         |  |
|              | Leakage Current               | Max. 0.5mA                                                                                                                 |                  |                                                                                                         |  |
|              | Working Temperature           | ta: -20 ~ 50°C tc: 85°C                                                                                                    |                  |                                                                                                         |  |
|              | Working Humidity              | 20 ~ 95%RH, non-condensing                                                                                                 |                  |                                                                                                         |  |
|              | Storage Temperature, Humidity | -40 ~ 80°C, 10~95%RH                                                                                                       |                  |                                                                                                         |  |
|              | Temperature Coefficient       | $\pm 0.03\%/^{\circ}C$ [0-50°C]                                                                                            |                  |                                                                                                         |  |
|              | Vibration                     | 10~500Hz, 2G 12min/1cycle, 72 min for X, Y and Z axes respectively                                                         |                  |                                                                                                         |  |
|              | Overheat Protection           | Intelligently adjust or turn off the output current if the PCB temperature $\geq 110^{\circ}C$ , and recover automatically |                  |                                                                                                         |  |
|              | Overload Protection           | Shut down the output when current load $\geq 102\%$ , and recover automatically                                            |                  |                                                                                                         |  |
| PROTECTION   | Short Circuit Protection      | Enter hiccup mode if short circuit occurs, and recover automatically                                                       |                  |                                                                                                         |  |
|              | Overvoltage Protection        | Shut down the output when non-load voltage $\geq 28V$ , and recover automatically                                          |                  | Shut down the output when non-load voltage $\geq 16V$ , and recover automatically                       |  |
|              | Withstand Voltage             | I/P-O/P: 3750Vac                                                                                                           |                  |                                                                                                         |  |
|              | Isolation Resistance          | I/P-O/P: 100MQ/500VDC/25°C/70%RH                                                                                           |                  |                                                                                                         |  |
| SAFETY & EMC | Safety Standards              | CCC                                                                                                                        | China            | GB19510.1, GB19510.14                                                                                   |  |
|              |                               | TUV                                                                                                                        | Germany          | EN61347-1, EN61347-2-13, EN62493                                                                        |  |
|              |                               | CB                                                                                                                         | CB member states | IEC61347-1, IEC61347-2-13                                                                               |  |
|              |                               | CE                                                                                                                         | European Union   | EN61347-1, EN61347-2-13, EN62384, EN61547                                                               |  |
|              |                               | KC                                                                                                                         | Korea            | KC61347-1, KC61347-2-13                                                                                 |  |
|              |                               | EAC                                                                                                                        | Russia           | IEC61347-1, IEC61347-2-13                                                                               |  |
|              |                               | RCM                                                                                                                        | Australia        | AS 61347-1, AS 61347-2-13                                                                               |  |
|              |                               | EMEC                                                                                                                       | Europe           | EN61347-1, EN61347-2-13, EN62384                                                                        |  |
|              |                               | UKCA                                                                                                                       | Britain          | BS EN 61347-2-13:2014+A1:2017, BS EN 61347-1:2015+A1:2021                                               |  |
|              | EMC Emission                  | CCC                                                                                                                        | China            | GB/T17743, GB17625.1                                                                                    |  |
|              |                               | CE                                                                                                                         | European Union   | EN55015, EN61000-3-2, EN61000-3-3, EN61547                                                              |  |
|              |                               | KC                                                                                                                         | Korea            | KN15, KN61547                                                                                           |  |
|              |                               | EAC                                                                                                                        | Russia           | IEC62493, IEC61547, EH55015                                                                             |  |
|              |                               | RCM                                                                                                                        | Australia        | EN55015, EN61000-3-2, EN61000-3-3, EN61547                                                              |  |
|              |                               | UKCA                                                                                                                       | Britain          | BS EN IEC 55015:2019/A11:2020, BS EN 61547:2009, BS EN IEC 61000-3-2:2019, BS EN 61000-3-3:2013/A1:2019 |  |
|              | EMC Immunity                  | EN61000-4-2, 3, 4, 5, 6, 8, 11, EN61547                                                                                    |                  |                                                                                                         |  |
|              | Strobe Test Standard          | IEEE 1789                                                                                                                  |                  |                                                                                                         |  |
| OTHERS       | Gross weight[G.W]             | 430g $\pm$ 10g                                                                                                             |                  |                                                                                                         |  |
|              | Dimensions                    | 352 $\times$ 43 $\times$ 30mm(L $\times$ W $\times$ H)                                                                     |                  |                                                                                                         |  |
|              | Package size                  | 355 $\times$ 44 $\times$ 33mm(L $\times$ W $\times$ H)                                                                     |                  |                                                                                                         |  |
|              | Carton Size                   | 370 $\times$ 340 $\times$ 93mm(L $\times$ W $\times$ H) 20pcs/ctn 9.4kg $\pm$ 5%/ctn                                       |                  |                                                                                                         |  |

The driver is suitable for connecting resistor current-limiting LED fixture (e.g. LED strip). The inrush current will be dozens of times increased if connecting built-in constant current IC current-limiting LED fixtures, the driver will activate the overloaded protection (hiccups flickering). When you order, please remark controlling the constant current LED fixture (e.g. MR16 lamp, underground light, LED wall washer, constant current LED strip, etc.), so that we can prepare them with special procedures.


## Dimensions

Unit: mm

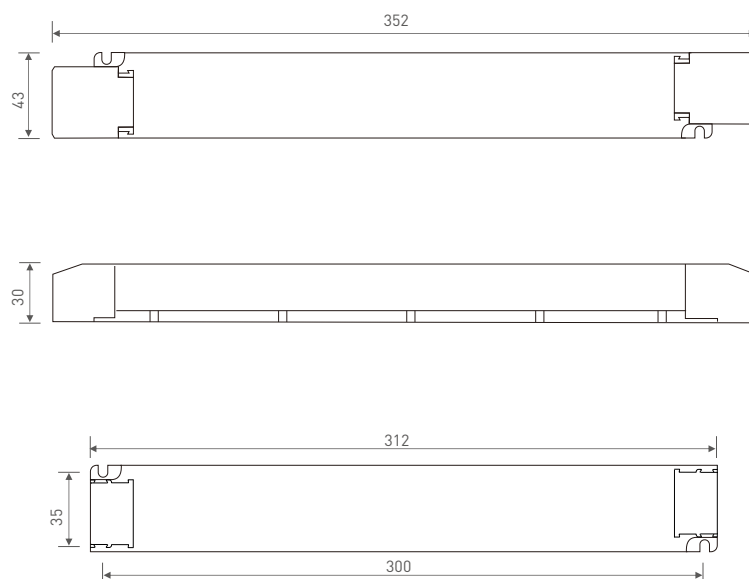


## Wiring Diagram

### 0-10V Connection

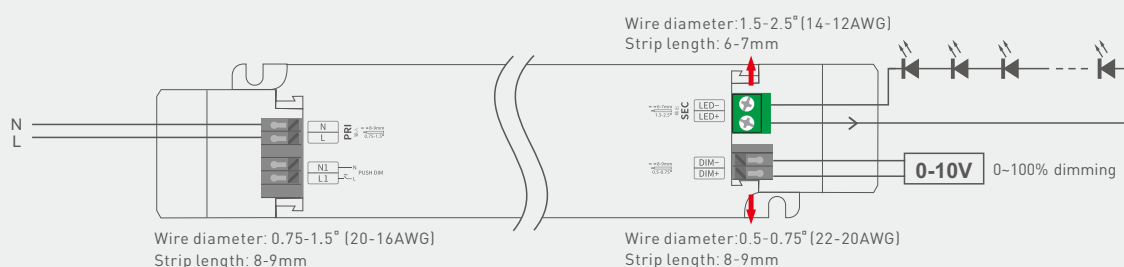

### Push DIM Connection

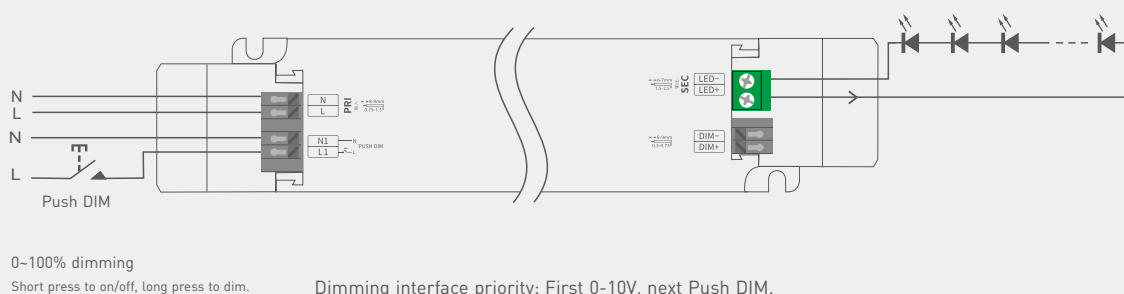

## Push DIM




Reset switch


- On/off control: Short press.
- Stepless dimming: Long press.
- With every other long press, the light level goes to the opposite direction.
- Dimming memory: Brightness will be the same as previously adjusted when turning off and on again.

## Application of Protective Cover


Wire pressing board:




Push the wire pressing board to fix the wires.





Push outward the side plate, meanwhile use the tool to uninstall the wire pressing board.




Uninstall protective cover:





Break off the bottom left and right to remove the protective cover.




## Installation Precautions







Please do not stack the products. The distance between two products should be  $\geq 15\text{cm}$  so as not to affect heat dissipation and the lifespan of the products.







Please not place the products on LED drivers. The distance between the product and the driver should be  $\geq 15\text{cm}$  so as not to affect heat dissipation and shorten the lifespan of the products.



## Relationship Diagrams

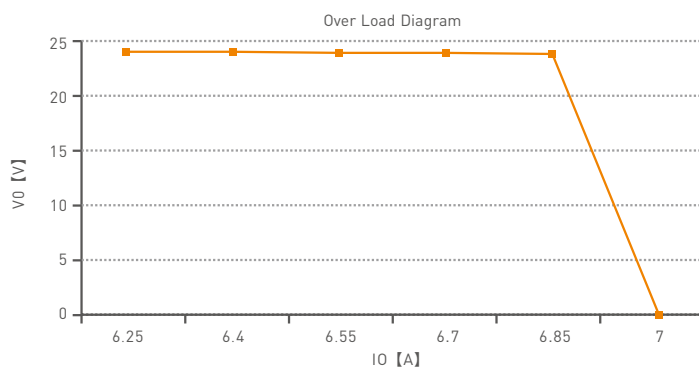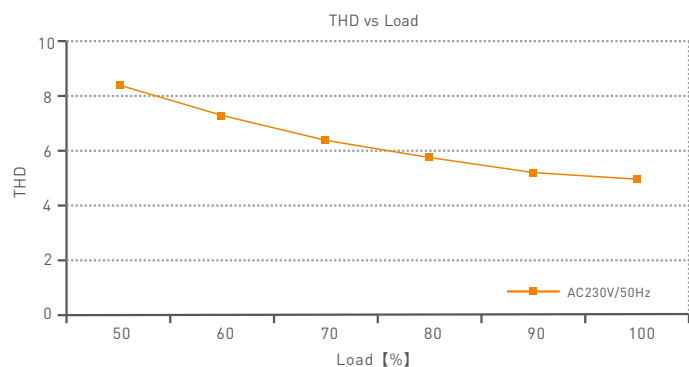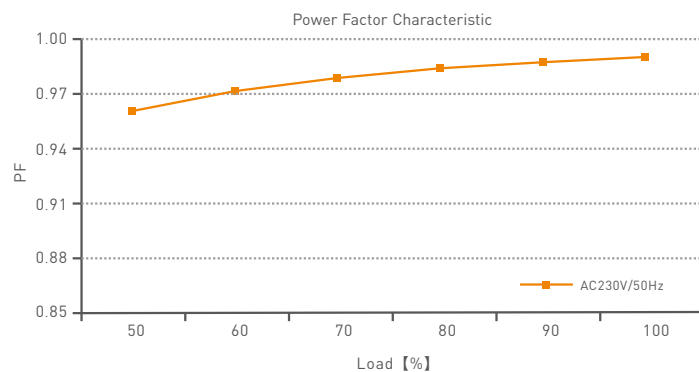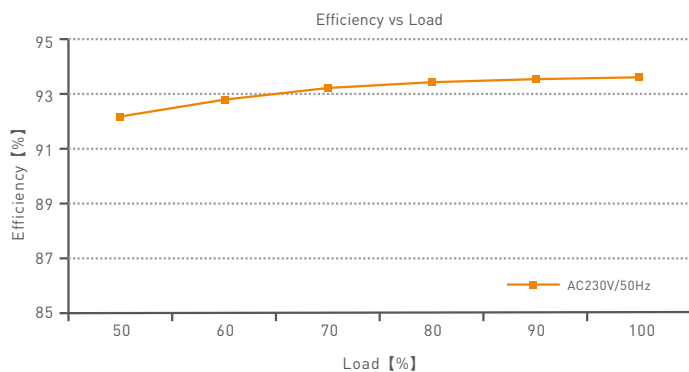


LM-150-24-G1A2

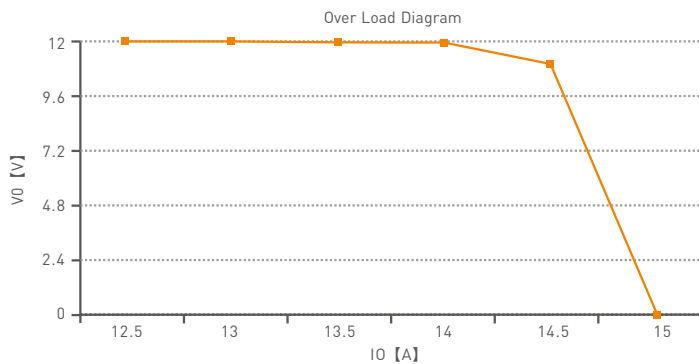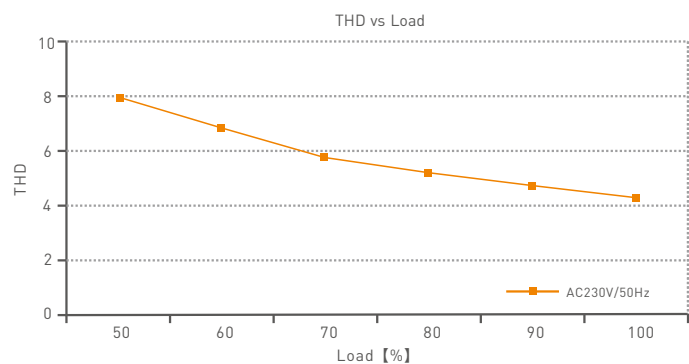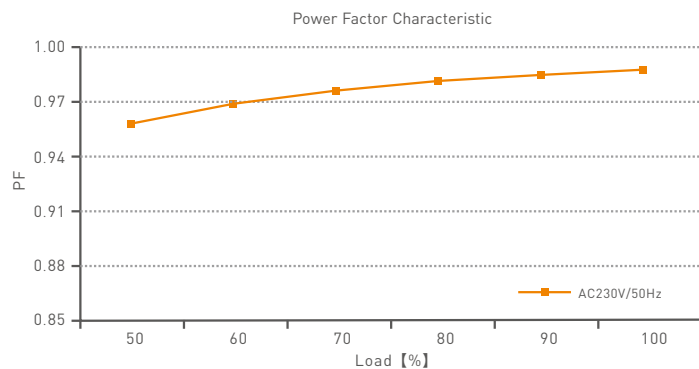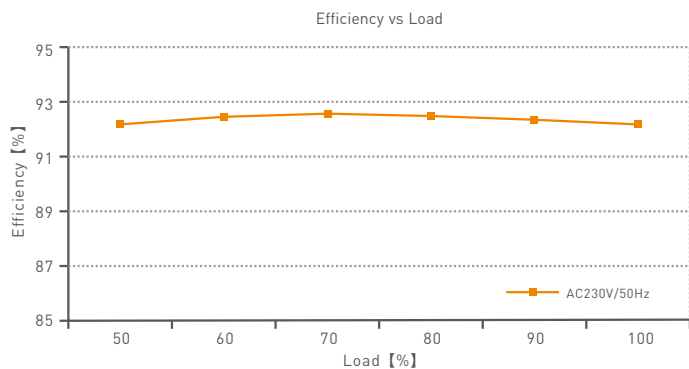

LM-150-12-G1A2

## Flicker Test Form

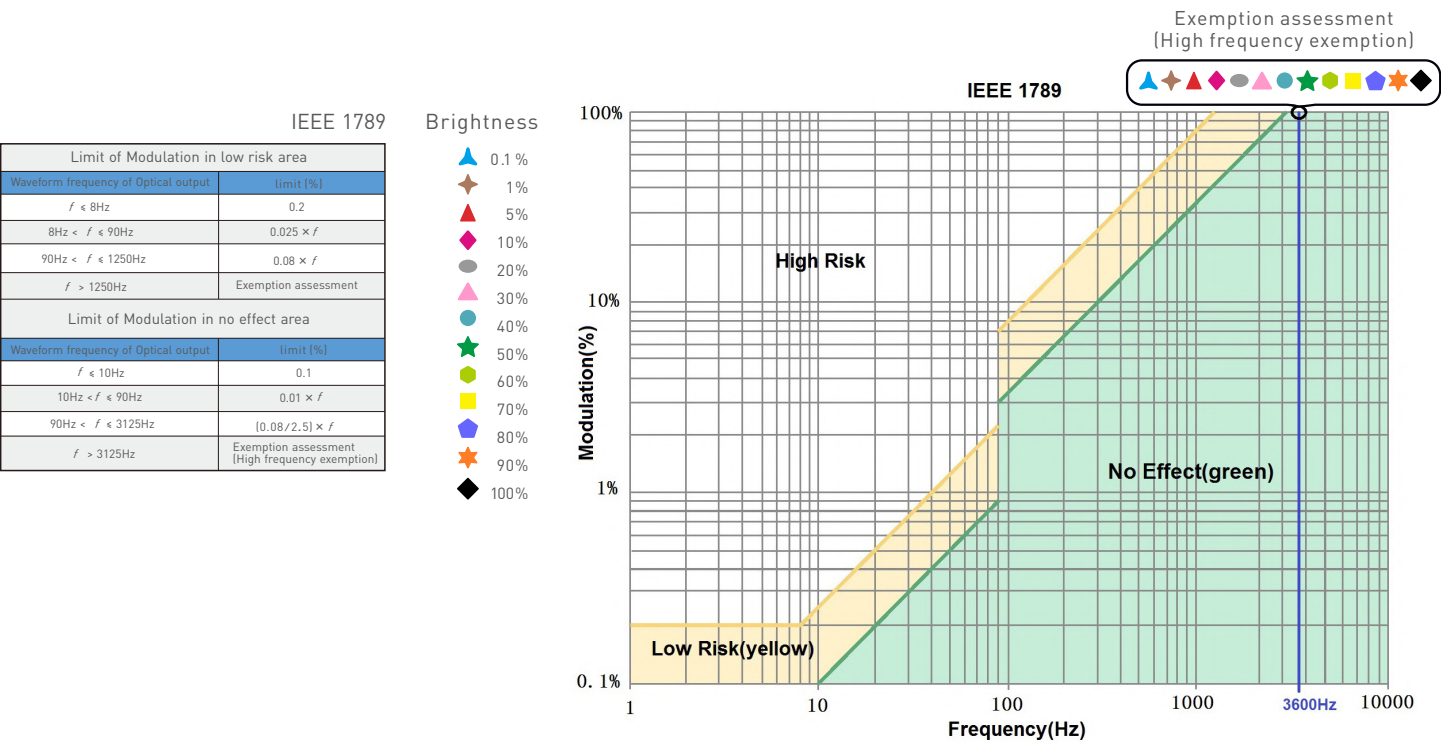

## Attentions

- Products shall be installed by qualified professionals.
  - LTECH products are non-waterproof (special models excepted). Please avoid the sun and rain. When installed outdoors, please ensure it is mounted in a water proof enclosure.
  - Good heat dissipation will extend the working life of products. Please ensure good ventilation.
  - Please check if the working voltage used complies with the parameter requirements of products.
  - The diameter of wire used must be able to load the light fixtures you connect and ensure the firm wiring.
  - Before you power on products, please make sure all the wiring is correct in case of incorrect connection that causes damage to light fixtures.
  - If a fault occurs, please do not attempt to fix products by yourself. If you have any question, please contact your suppliers.
- ※ This manual is subject to changes without further notice. Product functions depend on the goods. Please feel free to contact our official distributors if you have any question.

## Warranty Agreement

- Warranty periods from the date of delivery: 5 years.
- Free repair or replacement services for quality problems are provided within warranty periods.

Warranty exclusions below:

- Beyond warranty periods.
- Any artificial damage caused by high voltage, overload, or improper operations.
- Products with severe physical damage.
- Damage caused by natural disasters and force majeure.
- Warranty labels and barcodes have been damaged.
- No any contract signed by LTECH.

1. Repair or replacement provided is the only remedy for customers. LTECH is not liable for any incidental or consequential damage unless it is within the law.
2. LTECH has the right to amend or adjust the terms of this warranty, and release in written form shall prevail.

## Update Log

| Version | Updated Time | Update Content                | Updated by    |
|---------|--------------|-------------------------------|---------------|
| A0      | 2019.06.20   | Original version              | Huang Yunting |
| A1      | 2020.03.05   | Add flicker test form         | Huang Yunting |
| A2      | 2020.04.09   | Update product description    | Huang Yunting |
| A3      | 2021.06.04   | Change TUV certification icon | Liu Weili     |
| A4      | 2021.12.10   | Update product silk screen    | Liu Weili     |

LED 智能调光驱动器 (恒压型)

- 体积小、重量轻: 外壳采用科思创/三星PC阻燃V0级原料
- 免螺丝压线翻盖设计, 可拆卸端盖, 按需调节壳体长度
- 调光接口: 0-10V(1-10V/10V PWM/RX), Push DIM
- 自动识别0-10V、1-10V输入
- 0-10V 端口超低消耗<0.05mA
- 调光范围0~100%, LED从0.1%开始调光
- 带软启动渐亮功能, 让人眼视觉更舒服
- 高效能电源: 效率93%、PF>0.98、THD<6%
- 调光接口具备光电隔离, 符合最新的安规标准, 更安全可靠
- 符合欧盟能效ERP指令, 待机功耗0.5W
- 创新的热管理技术, 智能保护电源寿命
- 过温、过压、过载、短路保护, 可自动恢复
- 可拆卸端盖设计,方便调节电源的长度
- 适合室内 I、II、III类灯具应用
- 高达50,000小时的额定寿命
- 5年保修期 (采用红宝石电容)

无频闪  
IEEE 1789  
高频豁免考核级别

5合1调光  
0-10V  
1-10V  
10V PWM  
RX  
Push DIM  
0-10V接口消耗电流<0.05mA




技术参数

| 型号      |          | LM-150-24-G1A2                          |       | LM-150-12-G1A2                                                                                          |  |
|---------|----------|-----------------------------------------|-------|---------------------------------------------------------------------------------------------------------|--|
| 输出      | 输出电压     | 24Vdc                                   |       | 12Vdc                                                                                                   |  |
|         | 输出电压范围   | 24Vdc ± 0.5Vdc                          |       | 12Vdc ± 0.5Vdc                                                                                          |  |
|         | 输出电流     | Max. 6.25A                              |       | Max. 12.5A                                                                                              |  |
|         | 输出功率     | Max. 150W                               |       |                                                                                                         |  |
|         | 输出功率范围   | 0~150W                                  |       |                                                                                                         |  |
|         | 频闪级别     | 高频豁免考核级别                                |       |                                                                                                         |  |
|         | 调光范围     | 0~100%, 调光深度: 0.1%                      |       |                                                                                                         |  |
|         | 过功率限制    | ≥102%                                   |       |                                                                                                         |  |
|         | 纹波与噪声    | 开关纹波≤200mV, 噪声≤500mV                    |       | 开关纹波≤200mV, 噪声≤800mV                                                                                    |  |
| 输入      | PWM调光频率  | 3600Hz                                  |       |                                                                                                         |  |
|         | 调光接口     | 0-10V(1-10V/10V PWM/RX), Push DIM       |       |                                                                                                         |  |
|         | 输入电压     | 220-240Vac 200-280Vdc                   |       |                                                                                                         |  |
|         | 频率范围     | 50/60Hz                                 |       |                                                                                                         |  |
|         | 输入电流     | Max. 0.75A/230Vac                       |       |                                                                                                         |  |
|         | 功率因数     | PF>0.98/230Vac (满载)                     |       |                                                                                                         |  |
|         | 谐波THD    | 230Vac@THD<6% (满载)                      |       |                                                                                                         |  |
|         | 效率(Typ.) | 93%                                     |       | 92%                                                                                                     |  |
|         | 待机功耗     | 0.5W                                    |       |                                                                                                         |  |
| 环境      | 浪涌电流     | 冷启动45A/230Vac                           |       |                                                                                                         |  |
|         | 抗浪涌      | L-N: 2KV                                |       |                                                                                                         |  |
|         | 漏电流      | Max. 0.5mA                              |       |                                                                                                         |  |
|         | 工作温度     | ta: -20 ~ 50°C tc: 85°C                 |       |                                                                                                         |  |
|         | 工作湿度     | 20 ~ 95%RH, 无冷凝                         |       |                                                                                                         |  |
|         | 储存温度/湿度  | -40 ~ 80°C, 10~95%RH                    |       |                                                                                                         |  |
|         | 温度系数     | ±0.03%/°C(0-50°C)                       |       |                                                                                                         |  |
|         | 耐振动      | 10-500HZ, 2G 12分钟/周期, X, Y, Z轴各72分钟     |       |                                                                                                         |  |
|         | 耐冲击      | 15ms, 150g, X, Y, Z轴各3次                 |       |                                                                                                         |  |
| 保护      | 过温保护     | 根据PCB温度超标情况(≥110°C), 智能调节电流输出或关闭, 可自动恢复 |       |                                                                                                         |  |
|         | 过载保护     | 负载电流≥102%, 关闭输出, 可自动恢复                  |       |                                                                                                         |  |
|         | 短路保护     | 输出线路短路进入打嗝模式, 可自动恢复                     |       |                                                                                                         |  |
|         | 过压保护     | 空载电压≥28V, 关闭输出, 可自动恢复                   |       | 空载电压≥16V, 关闭输出, 可自动恢复                                                                                   |  |
|         | 耐压       | 输入对输出: 3750Vac                          |       |                                                                                                         |  |
|         | 绝缘阻抗     | 输入对输出: 100MQ/500VDC/25°C/70%RH          |       |                                                                                                         |  |
|         | 安全规范     | CCC                                     | 中国    | GB19510.1, GB19510.14                                                                                   |  |
|         |          | TUV                                     | 德国    | EN61347-1, EN61347-2-13, EN62493                                                                        |  |
|         |          | CB                                      | CB成员国 | IEC61347-1, IEC61347-2-13                                                                               |  |
| 安规和电磁规格 |          | CE                                      | 欧盟    | EN61347-1, EN61347-2-13, EN62384                                                                        |  |
|         |          | KC                                      | 韩国    | KC61347-1, KC61347-2-13                                                                                 |  |
|         |          | EAC                                     | 俄罗斯   | IEC61347-1, IEC61347-2-13                                                                               |  |
|         |          | RCM                                     | 澳洲    | AS 61347-1, AS 61347-2-13                                                                               |  |
|         |          | ENEC                                    | 欧洲    | EN61347-1, EN61347-2-13, EN62384                                                                        |  |
|         |          | UKCA                                    | 英国    | BS EN 61347-2-13:2014+A1:2017, BS EN 61347-1:2015+A1:2021                                               |  |
|         | 电磁兼容发射   | CCC                                     | 中国    | GB/T17743, GB17625.1                                                                                    |  |
|         |          | CE                                      | 欧盟    | EN55015, EN61000-3-2, EN61000-3-3, EN61547                                                              |  |
|         |          | KC                                      | 韩国    | KN15, KN61547                                                                                           |  |
| 其他      |          | EAC                                     | 俄罗斯   | IEC62493, IEC61547, EH55015                                                                             |  |
|         |          | RCM                                     | 澳洲    | EN55015, EN61000-3-2, EN61000-3-3, EN61547                                                              |  |
|         |          | UKCA                                    | 英国    | BS EN IEC 55015:2019/A11:2020, BS EN 61547:2009, BS EN IEC 61000-3-2:2019, BS EN 61000-3-3:2013/A1:2019 |  |
|         | 电磁兼容抗扰度  | EN61000-4-2,3,4,5,6,8,11, EN61547       |       |                                                                                                         |  |
|         | 频闪测试标准   | IEEE 1789                               |       |                                                                                                         |  |
|         | 产品重量     | 430g±10g                                |       |                                                                                                         |  |
|         | 产品尺寸     | 352×43×30mm(L×W×H)                      |       |                                                                                                         |  |
|         | 包装尺寸     | 355×44×33mm(L×W×H)                      |       |                                                                                                         |  |
|         | 外箱规格     | 370×340×93mm(L×W×H) 20个/箱 9.4kg±5%/箱    |       |                                                                                                         |  |

本款驱动器适合连接电阻限流的LED灯具(如LED灯条)。如果连接内置恒流IC限流的灯具, 会产生几十倍瞬间浪涌电流, 导致驱动器会执行过载保护(打嗝频闪)。下单时这类内置恒流IC限流的灯具需要注明(如MR16灯杯、地埋灯、洗墙灯、恒流硬灯条等), 以便烧写特殊程序。


尺寸图

单位: mm

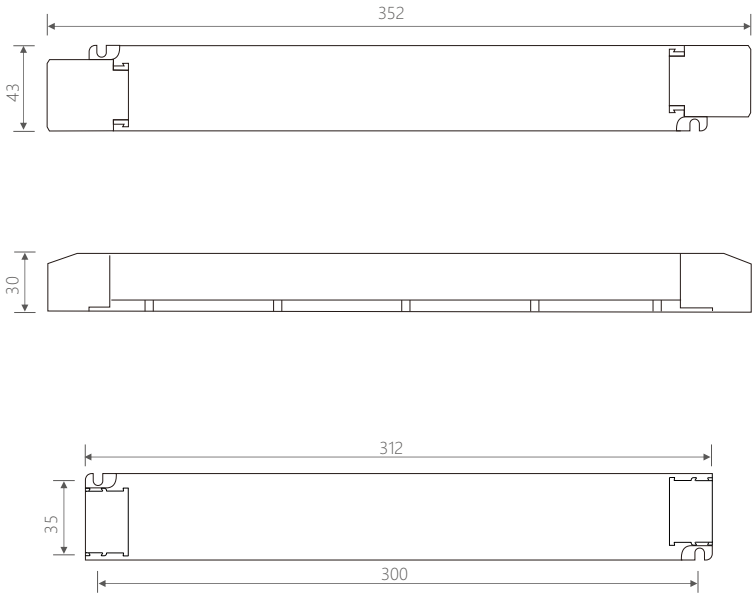


连接应用图

0-10V 连接方式

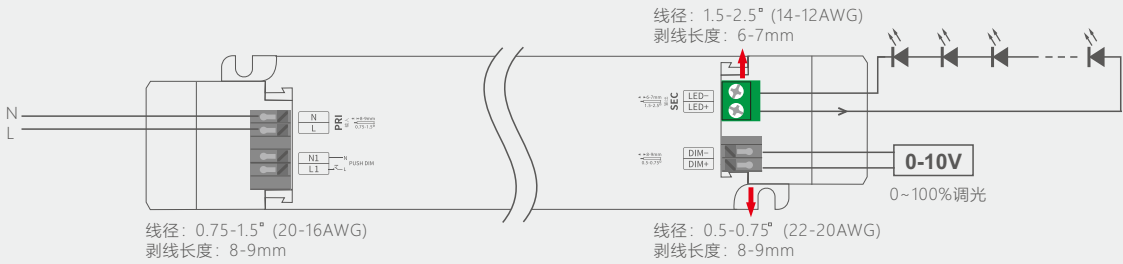

Push DIM 连接方式

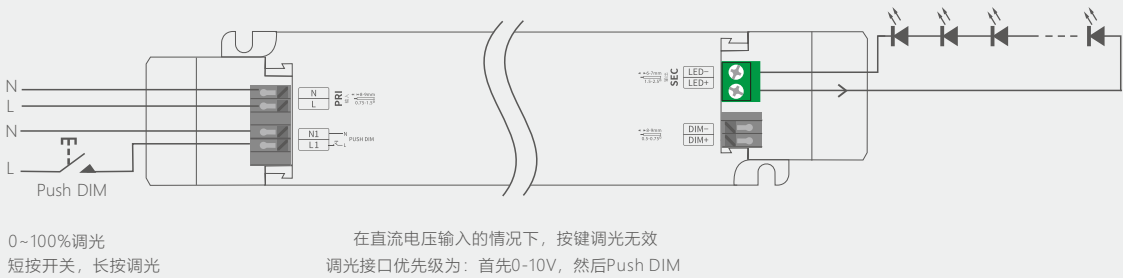

## Push DIM




复位开关

- 开关控制: 短按.
- 无级调光: 长按.
- 每隔一次长按, 明暗度会向相反方向调整.
- 调光记忆: 当再次开关时, 灯光会回到先前调整的亮度水平.


## 保护盖应用图

压线板

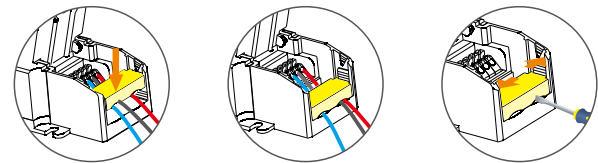


向下推压线板, 可固定住线。 向外推侧板的同时, 用工具撬即可拆下压线板。

保护盖的拆装


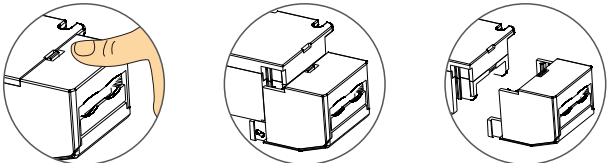


在底部左右掰动, 即可将保护盖拆下。


## 安装注意事项







请勿将产品堆叠摆放, 产品与产品间隔距离应 $\geq 15\text{cm}$ , 避免影响产品散热和使用寿命。







请勿将产品置于电源上方, 与电源间隔距离应 $\geq 15\text{cm}$ , 避免影响产品散热而减少使用寿命。



关系图表

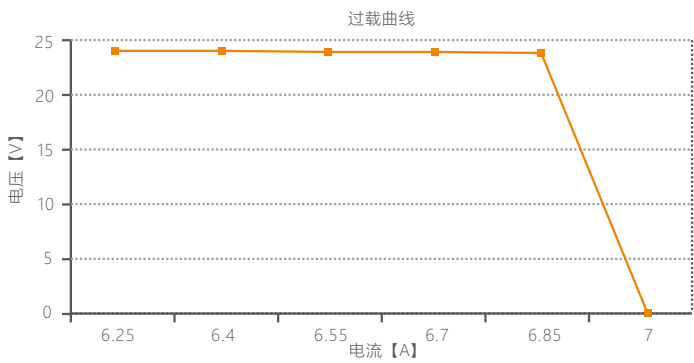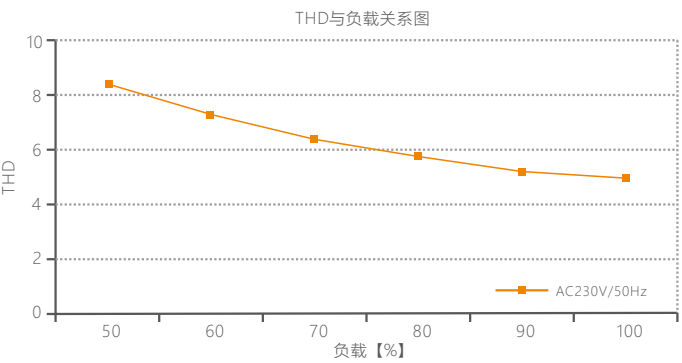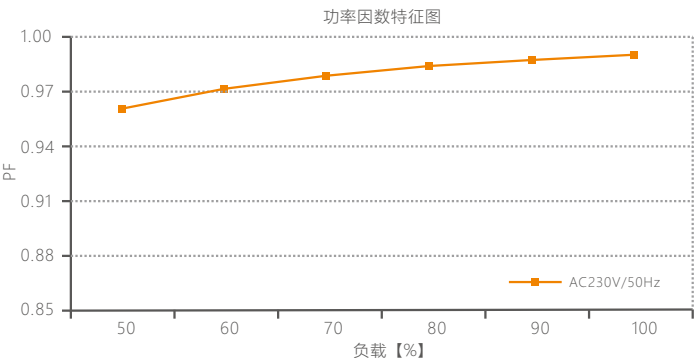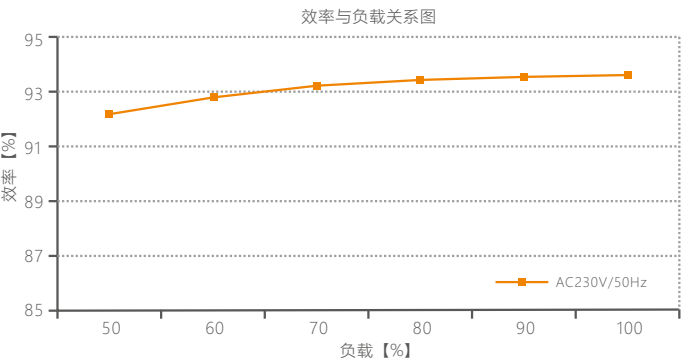


LM-150-24-G1A2

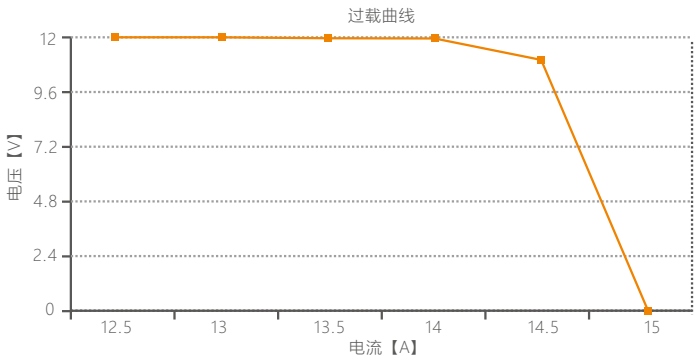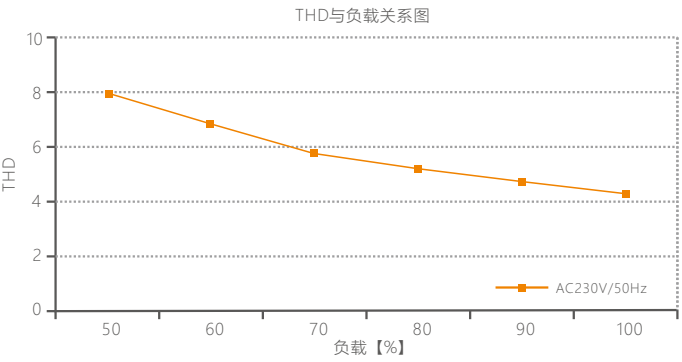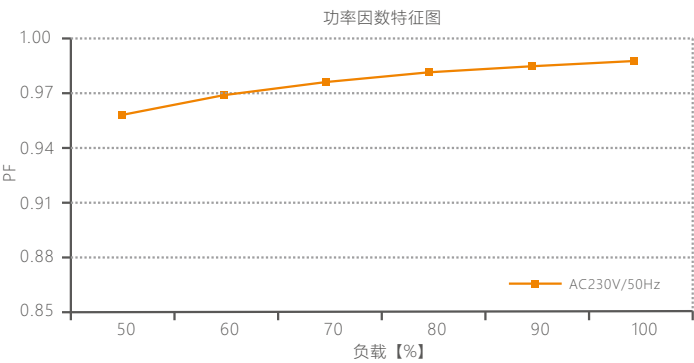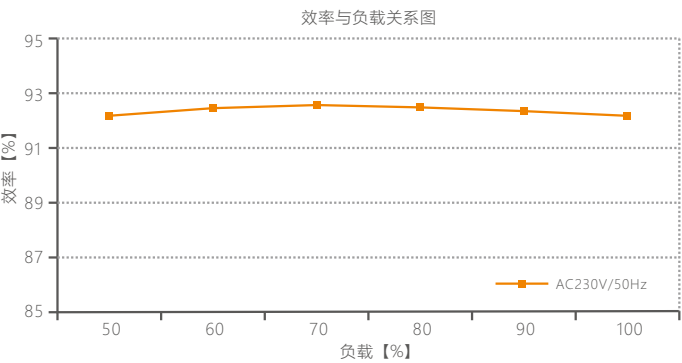

LM-150-12-G1A2

频闪测试表

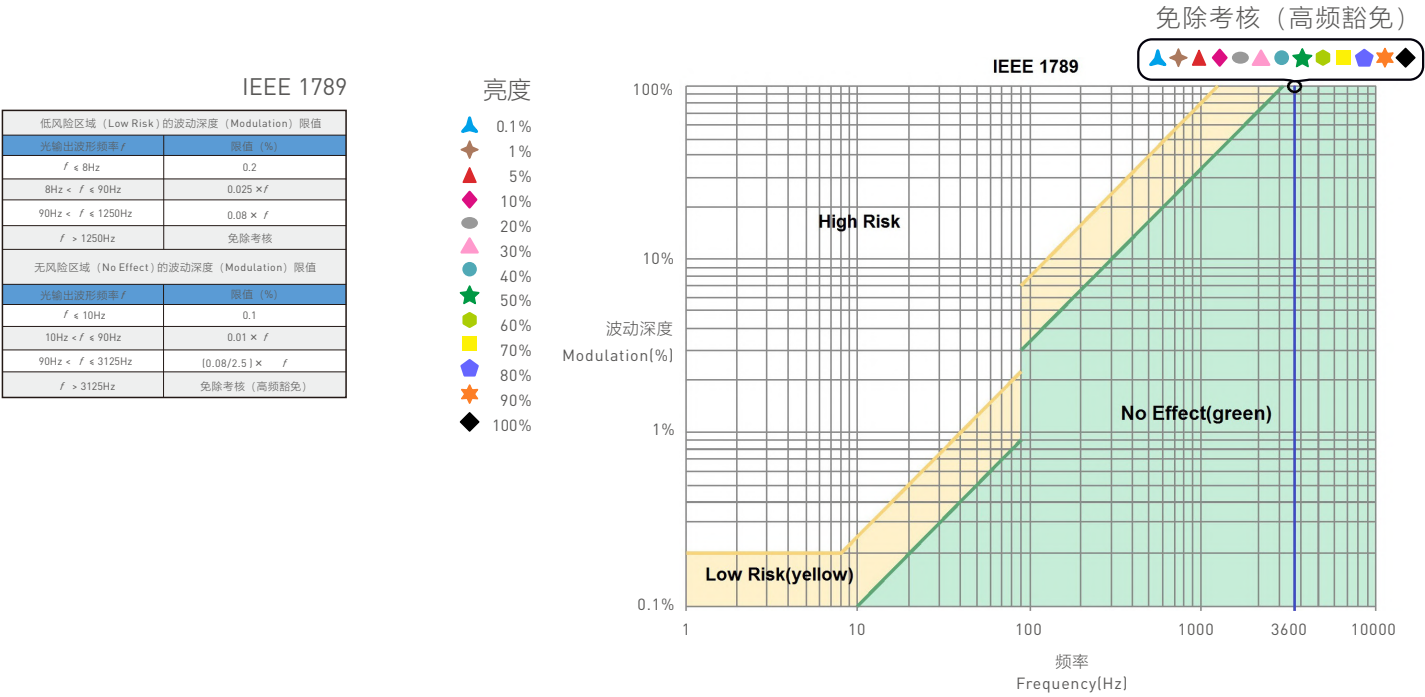

注意事项

- 请由具有专业资格的人员进行调试安装;
  - 雷特产品 (专有型号除外) 不能防水, 需避免日晒雨淋, 如安装在户外, 请用防水箱;
  - 良好的散热条件会延长产品的使用寿命, 请把产品安装在通风良好的环境;
  - 请检查使用的工作电压是否符合产品的参数要求;
  - 使用的电线直径大小必须能足够负载连接的LED灯具, 并确保接线牢固;
  - 通电调试前, 应确保所有接线正确, 以避免因接线错误而导致灯具损坏;
  - 如果发生故障, 请勿私自维修; 如有疑问, 请联系供应商。
- \* 本说明书的内容如有变更, 恕不另行通知。若内容与您使用的功能有所不同, 则以实物为准。如有疑问, 欢迎向我司授权的经销商咨询。

保修条例

- 自出厂之日起保修服务期为5年。
  - 在保修服务期内出现产品质量问题雷特将给予免费修理或更换服务。
- 非保修条例:
- 属下列情况不在免费保修或更换服务范围之内:
- 已经超出保修服务期;
  - 过高电压、超负载、操作不当等人为造成的损坏;
  - 产品外形严重损坏或变形;
  - 自然灾害以及人力不可抗拒原因造成的损坏;
  - 产品保修标签和产品唯一条形码损坏;
  - 无雷特签订的合同或发票凭证。
1. 修理或更换是雷特对客户的唯一补救措施。雷特不承担任何附带引起的损害赔偿责任, 除非在适用法律范围之内。
  2. 雷特享有修正或调整本保修条款的权利, 并以书面形式发布为准。

更新日志

| 版本 | 更改日期       | 更改内容      | 更改人 |
|----|------------|-----------|-----|
| A0 | 2019.06.20 | 正稿        | 黄韵婷 |
| A1 | 2020.03.05 | 增加无频闪测试表  | 黄韵婷 |
| A2 | 2020.04.09 | 更新产品描述    | 黄韵婷 |
| A3 | 2021.06.04 | 更改TUV认证图标 | 刘伟丽 |
| A4 | 2021.12.10 | 更新产品丝印    | 刘伟丽 |