

Intelligent LED Driver (Constant Current)

- Small size and light weight. The clamshell design and screwless type for strain-relief. The clamshell design and screwless type for strain-relief. The design of dismountable end cap allows you to adjust the length of housing depending on your needs.
- Multiple current levels and wide voltage range. Suitable for different power of LEDs.
- Comply with no-load power consumption of the EU's ErP Directive, standby power consumption < 0.5W.
- With soft-on and fade-in dimming function, enhancing your visual comfort.
- T-PWM™dimming technology allows continuous and flicker-freeimages under high-speed photography.
- The whole dimming process is flicker-free with high frequency exemption level.
- Dimming from 0~100%, down to 0.1%.
- DALI bus standard IEC62386-101, 102, 207.
- DALI dimming curves are available in linear and logarithmic curve.
- The secure and reliable design for signal isolation.
- Innovative thermal management technology intelligently protects the life of the LED driver.
- Overheat, over voltage , overload, short circuit protection and automatic recovery.
- Suitable for Class I / II /III indoor light fixtures.
- Up to 50,000-hour life time.
- 5-year warranty (Rubycon capacitor).

T-PWM™
Dimming Technology

Flicker Free
IEEE 1789



Dimmable:
0.01-100% 



The certification icon represents on-going certification applications only, and final certification qualification is subject to actual products.



Technical Specs

Model	SE-12-100-450-W1D			
Features	Output Type	Constant Current		
	Dimming Interface	DALI DT6		
	Output Feature	Isolation		
	Protection Grade	IP20		
	Insulation Grade	Class II (Suitable for class I/ II /III light fixtures)		
OUTPUT	Maximum output voltage	≤48V		
	Output Voltage	9-42Vdc		
	Output Current Range	100-450mA		
	Output Power Range	0.9-12W		
	Dimming Range	0-100%, down to 0.01%		
	Ripple Current	<3%(Maximum current non dimming state)		
	Current Accuracy	±5%		
INPUT	PWM Frequency	<3600Hz		
	DC Voltage Range	120-300Vdc		
	AC Voltage Range	100-240Vac		
	Rated voltage	115Vac / 230Vac		
	Frequency	50/60Hz		
	Power transmission	Max.16W		
	Input Current	≤0.18A/115Vac , at full load ≤0.08/23Vac , at full load		
	Power Factor	PF>0.9C/230Vac , at full load PF>0.95C/115Vac , at full load		
	THD	THD<10%/230Vac , at full load		
	Efficiency (Typ.)	>82% , at full load		
	Inrush Current	Cold start 15A[Test twidth=102us tested under 50% Ipeak]/230Vac		
	Anti Surge	L-N: 2kV		
Leakage Current	<0.5mA/230Vac			
ENVIRONMENT	Working Temperature	ta: -20 ~ 50°C tc: 80°C		
	Working Humidity	20 ~ 95%RH, non-condensing		
	Storage Temperature/Humidity	-40 ~ 80°C, 10 ~ 95%RH		
	Temperature Coefficient	±0.03%/°C [-20°C ~ 45°C]		
	Vibration	10-500Hz, 2G 12min/1cycle, 72 min for X, Y and Z axes respectively		
PROTECTION	Overload Protection	Shut down the output and recover automatically once it exceeds 1.02-1.35 times of the rated power		
	Overheat Protection	Intelligently adjust or turn off the current output if the PCB temperature ≥110°C. When the PCB temperature <90°C, automatically recover normal output		
	Short Circuit Protection	When short circuit occurs, shut down the output and recover automatically		
SAFETY & EMC	Withstand Voltage	I/P-O/P: 3750Vac		
	Insulation Resistance	I/P-O/P: 100MΩ/500VDC/25°C/70%RH		
	Safety Standards	CCC	China	GB19510.1, GB19510.14
		TUV	Germany	EN61347-1, EN61347-2-13, EN62493
		CB	European Union	IEC61347-1, IEC61347-2-13
		RCM	Korea	AS/NZS61347.1, AS61347-2-13
		CE	Australia	EN61347-1, EN61347-2-13, EN62493
		KC	Europe	KC61347-1 KC61347-2-13
		UKCA	CB Member States	BS EN61347-1, BS EN61347-2-13, BS EN62493
		ENEC	Russia	EN61347-1, EN61347-2-13, EN62384
	BIS	India	IS 15885(PART 2/SEC 13)	
	EMC Emission	CCC	China	GB/T17743, GB17625.1
		RCM	Australia	EN IEC 55015, EN IEC 61000-3-2, EN61000-3-3
		UKCA	Europe	BS EN61347-1, BS EN61347-2-13, BS EN62493
		KC	Korea	KS C 9815, KS C 9547
		CE	European Union	EN IEC 55015, EN IEC 61000-3-2, EN61000-3-3
		EAC	Russia	IEC 62493 IEC 61547 EH 55015 IEC 61000-3-2, IEC 61000-3-3
		BIS	India	IS 15885(PART 2/SEC 13)
	EMC Immunity	EN 61000-4-2,3,4,5,6,8,11, EN 61547		
ErP	Power Consumption	Standby power consumption	No standby mode	
		Networked standby	<0.5W	
		No-load power consumption	<0.5W	
	Flicker/Stroboscopic Effect	IEEE 1789	Meet IEEE 1789 standard/High frequency exemption level	
	DF	CIE SVM	Pst LM≤1.0, SVM≤0.4	
OTHERS	Phase factor	DF≥0.9		
	Weight[N.W.]	80±10g		
	Dimensions	110×35×20mm(L×W×H)		

LED Current Selection

DIP switch quickly selects 8-gear current value




SE-12-100-450-W1D	DIP Switch									 ON OFF
	Output Current	100mA	150mA	200mA	250mA	300mA	350mA	400mA	450mA	
	Output Voltage	9-42V	9-42V	9-42V	9-42V	9-40V	9-34V	9-30V	9-27V	
	Output Power	0.9-4.2W	1.35-6.3W	1.8-8.4W	2.25-10.5W	2.7-12W	3.15-11.9W	3.6-12W	4.05-12.15W	


- * After setting the current via DIP switches, power off and then power on the driver to make the new current setting effective.
- * E.g. LED 3V/pcs: 9-42V can power 3-14pcs LEDs in series, 9-21.5V can power 3-7pcs LEDs, the max quantity of LEDs in series will be subject to the actual voltage of LEDs.

Product Size


Unit: mm

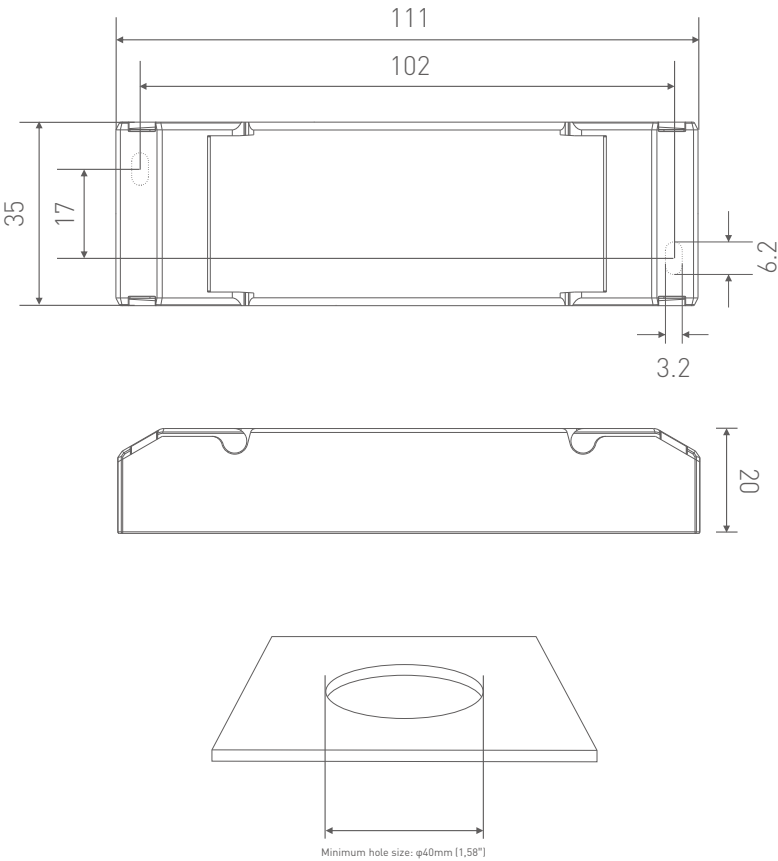


Wiring Diagram

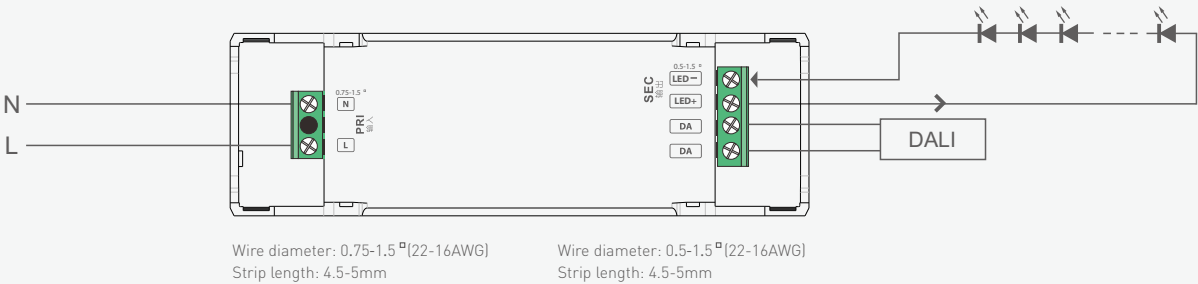


Protective Housing Application Diagram

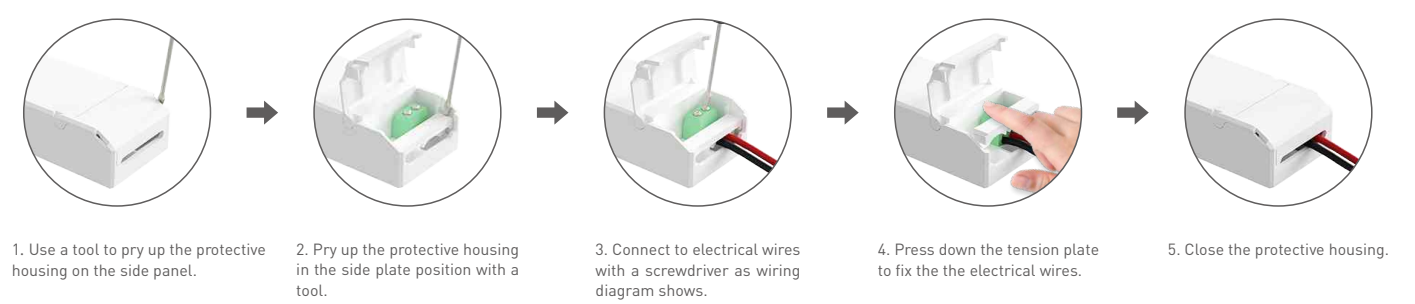

Relationship Diagrams

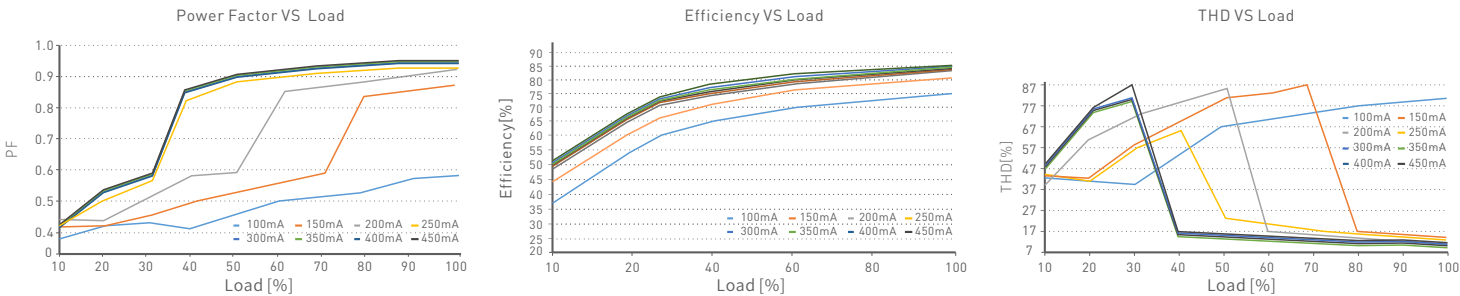

Flicker Test Form

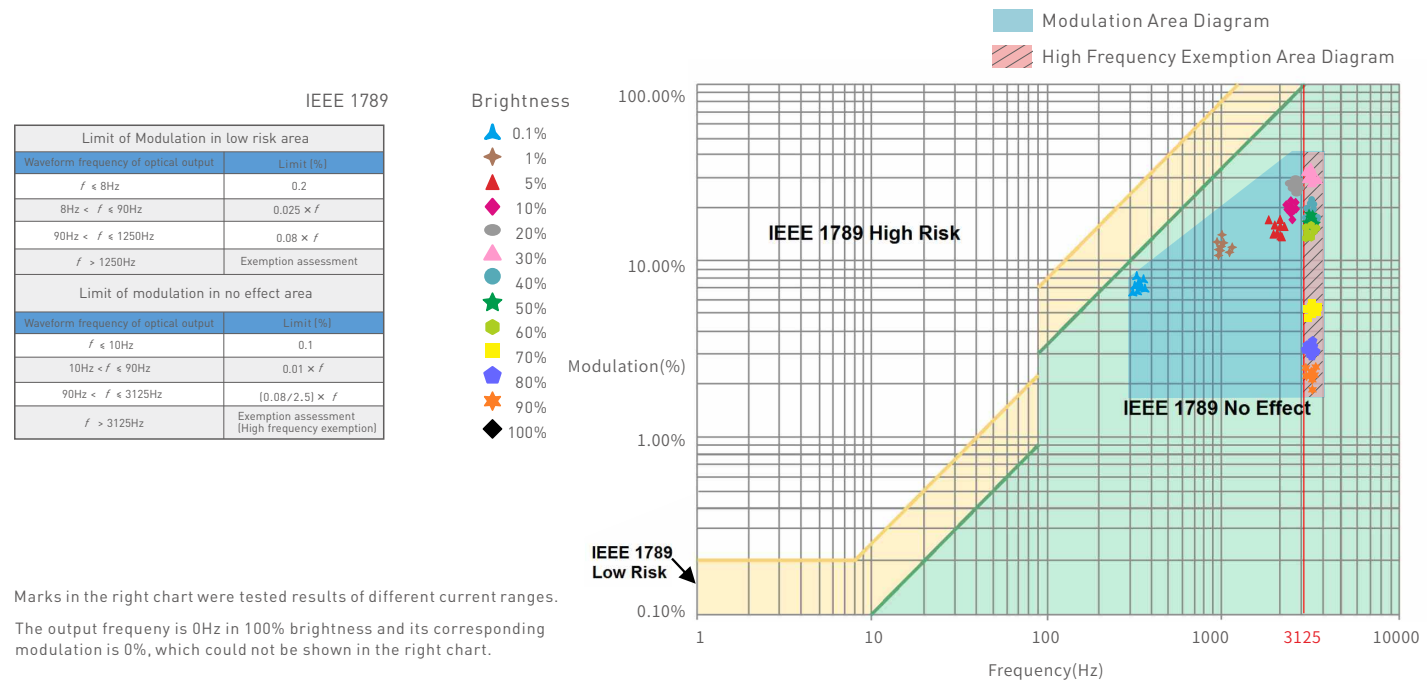

Packaging Specifications

Model	SE-12-100-450-W1D
Carton Dimensions	260×235×195mm(L×W×H)
Quantity	20 PCS/Layer; 5 Layers/Carton; 100 PCS/Carton
Weight	0.077kg/PC; 15.75kg±5%/Carton

Packaging Image



Inner Packaging Box



Carton Packaging

Transportation and Storage

1. Transportation

Products can be shipped via vehicles, boats and planes.

During transportation, products should be protected from rain and sun. Please avoid severe shock and vibration during the loading and unloading process.

2. Storage

The storage conditions should comply with the Class I Environmental Standards. The products that have been stored for more than six months are recommended to be re-inspected and can be used only after they have been qualified.

Attentions

- This product must be installed and adjusted by a qualified professional.
- This product is non-waterproof (special models excepted). Please avoid the sun and rain. When installed outdoors, please ensure it is mounted in a water proof enclosure.
- Good heat dissipation will extend the life the product. Please install the product in a environment with good ventilation.
- When you install this product, please avoid being near a large area of metal objects or stacking them to prevent signal interference.
- Please keep the product away from a intense magnetic field, a high pressure area or a place where lightning is easy to occur.
- Please check whether the working voltage used complies with the parameter requirements of the product.
- Before you power on the product, please make sure all the wiring is correct in case of incorrect connection that may cause a short circuit and damage the components, or trigger a accident.
- If a fault occurs, please do not attempt to fix the product by yourself. If you have any question, please contact the supplier.

* This manual is subject to changes without further notice. Product functions depend on the goods. Please feel free to contact our official distributors if you have any question.

Warranty Agreement

- Warranty periods from the date of delivery: 5 years.
- Free repair or replacement services for quality problems are provided within warranty periods.

Warranty exclusions below:

- Beyond warranty periods.
- Any artificial damage caused by high voltage, overload, or improper operations.
- Products with severe physical damage.
- Damage caused by natural disasters and force majeure.
- Warranty labels and barcodes have been damaged.
- No any contract signed by LTECH.

1. Repair or replacement provided is the only remedy for customers. LTECH is not liable for any incidental or consequential damage unless it is within the law.
2. LTECH has the right to amend or adjust the terms of this warranty, and release in written form shall prevail.

Update Log

Version	Updated Time	Update Content	Updated by
A0	2022.11.26	Original version	Yang Weiling


LED 智能调光驱动器 (恒流型)

- 超小体积、轻薄、免螺丝端盖设计
- 免螺丝压线翻盖设计，可拆卸端盖，按需调节壳体长度
- 多电流、宽电压，适用不同功率的LED
- 欧盟ErP空载功耗、待机功耗 < 0.5W
- 带软启动渐亮功能，让人眼视觉更舒服
- T-PWM™超深度调光技术，呈现高级感
- 0~100%全程无频闪，高级豁免考核级别
- 调光范围: 0~100%，LED从0.01%开始调光
- DALI总线标准 IEC62386-101, 102, 207
- DALI调光曲线可选线性或对数曲线
- 信号光电隔离设计，更加安全可靠
- 创新的热管理技术，智能保护电源寿命
- 过温、过载、短路保护，可自动恢复
- 适合室内 I、II、III 类灯具应用
- 高达50,000小时的额定寿命
- 5年保修期（采用红宝石电容）

T-PWM™
超深度调光技术

无频闪
IEEE 1789
高频豁免考核级别

Dimmable:
0.01-100%
DALI 2 ErP

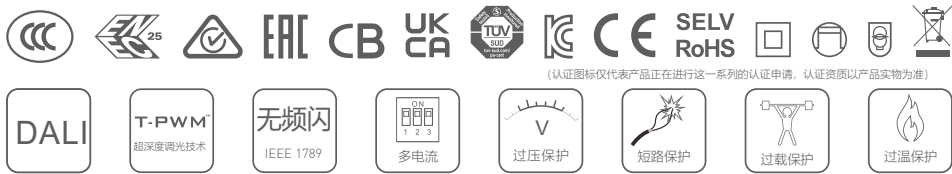

技术参数

型号	SE-12-100-450-W1D		
特征	输出类型	恒流	
	调光类型	DALI DT6	
	输出特征	隔离	
	防护等级	IP20	
	绝缘等级	II 类（适用于I类和II类灯具）	
输出	最大输出电压	≤48V	
	输出电压范围	9-42Vdc	
	工作电流	100-450mA	
	负载功率范围	0.9-12W	
	调光范围	0~100%，调光深度0.01%	
	纹波电流	<3%[最大电流不调光状态]	
	电流精度	±5%	
	PWM频率	≤3600Hz	
	直流电压范围	120-300Vdc	
输入	交流电压范围	100-240Vac	
	额定电压	115Vac / 230Vac	
	频率范围	50/60Hz	
	最大输入功率	Max.16W	
	输入电流	≤0.18A/115Vac[满载] ≤0.08A/230Vac[满载]	
	功率因数	PF>0.95/115Vac [满载] PF>0.9C/230Vac [满载]	
	谐波THD	THD<10%/230Vac [满载]	
	效率 [Typ]	>82%[满载]	
	浪涌电流	冷启动15A[在50% Ipeak下测试twidth=102us]/230Vac	
	抗浪涌	L-N: 2kV	
	漏电流	<0.5mA/230Vac	
	工作温度	ta: -20 ~ 50°C tc: 80°C	
环境	工作湿度	20 ~ 95%RH, 无冷凝	
	储存温度、湿度	-40 ~ 80°C, 10 ~ 95%RH	
	温度系数	±0.03%/°C [-20°C ~ 50°C]	
	耐振动	10-500HZ, 2G 12分钟/周期, X,Y,Z轴各72分钟。	
保护	过载保护	负载超过额定功率≥ 1.02倍时自动保护，减轻负载自动恢复。	
	过温保护	根据PCB温度超标情况(≥ 110°C)，智能调节电流输出或关闭，后可自动恢复。PCB温度<90°C时，自动恢复正常输出。	
	短路保护	输出线路短路自动关闭，可自动恢复。	
安规和电磁规格	耐压	输入对输出： 3750Vac	
	绝缘阻抗	输入对输出： 100MQ/500VDC/25°C/70%RH	
	安全规范	CCC	中国 GB19510.1, GB19510.14
		TUV	德国 EN61347-1, EN61347-2-13, EN62493
		CB	CB成员国 IEC61347-1, IEC61347-2-13
		RCM	澳洲 AS/NZS61347.1, AS61347-2-13
		CE	欧盟 EN61347-1, EN61347-2-13, EN62493
		KC	韩国 KC61347-1 KC61347-2-13
		UKCA	英国 BS EN61347-1, BS EN61347-2-13, BS EN62493
		BIS	印度 IS 15885(PART 2/SEC 13)
		EAC	俄罗斯 IEC 62493 IEC 61547 EH 55015 IEC 61000-3-2, IEC 61000-3-3
		ENEC	欧洲 EN61347-1, EN61347-2-13, EN62384
	电磁兼容发射	CCC	中国 GB/T17743, GB17625.1
		RCM	澳洲 EN IEC 55015, EN IEC 61000-3-2, EN61000-3-3
		CE	欧盟 EN IEC 5501, EN IEC 61000-3-2, EN61000-3-3
		KC	韩国 KS C 9815, KS C 9547
		UKCA	英国 BS EN IEC 55015, BS EN IEC 61000-3-2, BS EN 61000-3-3, BS EN 61547
		EAC	俄罗斯 IEC 62493 IEC 61547 EH 55015 IEC 61000-3-2, IEC 61000-3-3
		BIS	印度 IS 15885(PART 2/SEC 13)
	电磁兼容抗扰性	EN 61000-4-2,3,4,5,6,8,11, EN 61547	
ErP	功耗	待机功耗	无待机模式
		网络待机功耗	< 0.5W
		空载功耗	< 0.5W
	频闪/频闪效应	IEEE 1789	满足无影响/高频豁免考核级别
	DF	CIE SVM	Pst LM≤1.0, SVM≤0.4
其他	产品重量	80±10g	
	产品尺寸	110×35×20mm(L×W×H)	

LED电流选择

DIP开关快速选择 8 档电流值




SE-12-100-450-W1D	DIP开关																	ON OFF
	电流输出	100mA	150mA	200mA	250mA	300mA	350mA	400mA	450mA									
	电压输出	9-42V	9-42V	9-42V	9-42V	9-40V	9-34V	9-30V	9-27V									
	功率输出	0.9-4.2W	1.35-6.3W	1.8-8.4W	2.25-10.5W	2.7-12W	3.15-11.9W	3.6-12W	4.05-12.15W									


- * 确保驱动断电，再进行DIP开关设置所需电流。驱动重新上电后所需电流生效(注：若驱动不断电设置电流，可能会对灯具损坏)。
- * 假设LED的电压是3V/颗：电源9-42V的输出电压范围可串联3-14颗LED，9-27V的输出电压范围可串联3-9颗LED，最大串联数量以LED实际电压为准。

尺寸图


单位：mm

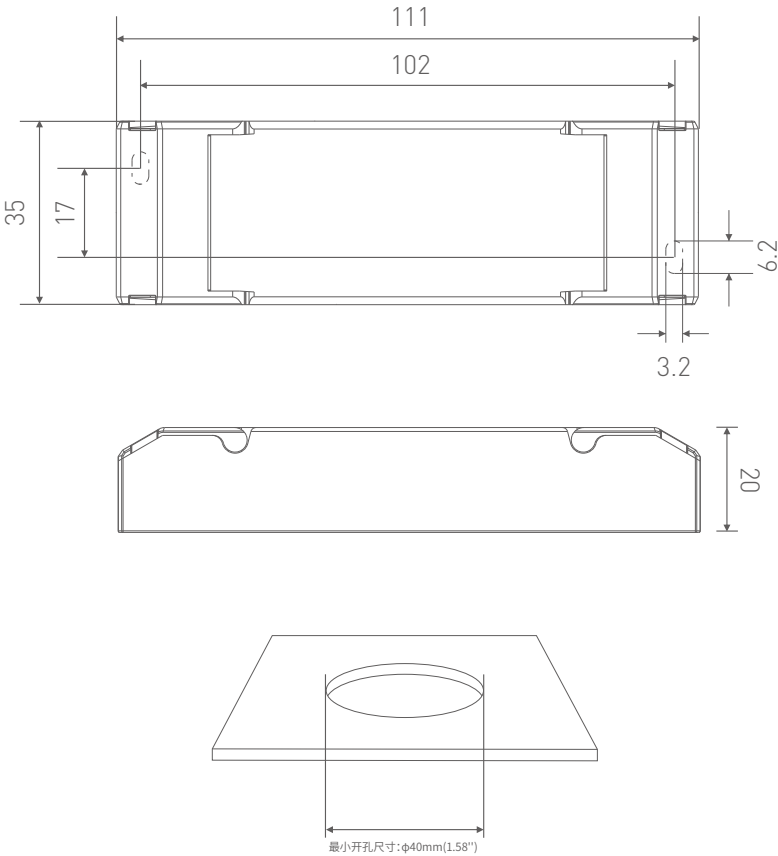


连线图

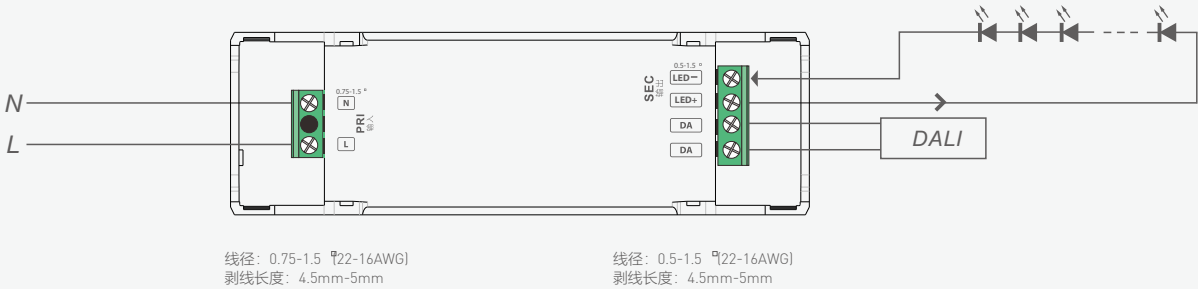


保护盖应用图

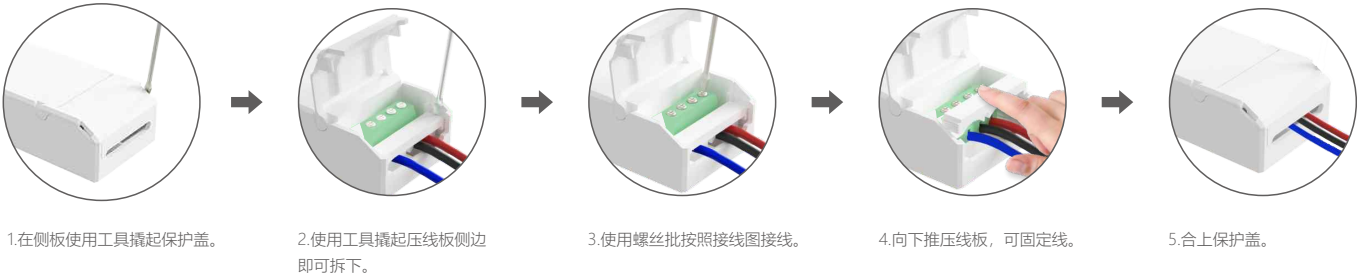

关系图表

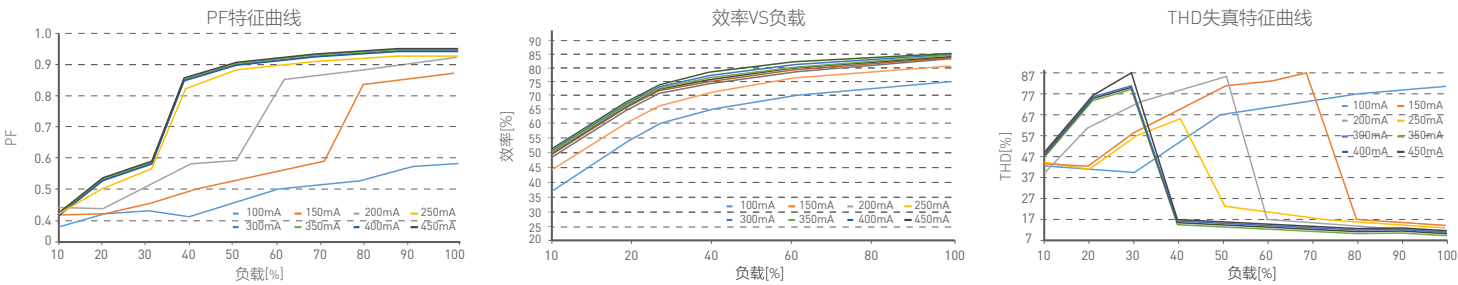

频闪测试表

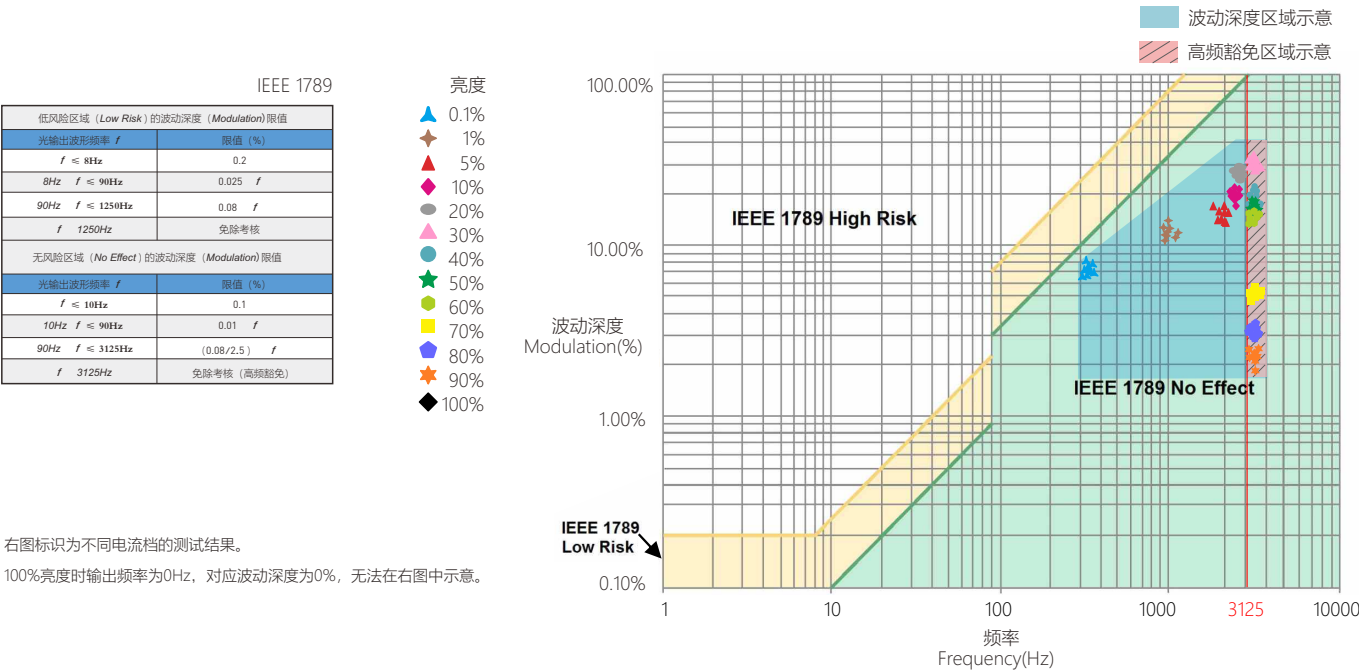

包装规格

型号	SE-12-100-450-W1D
包装箱尺寸	260×235×195mm (L×W×H)
数量	20 PCS/层； 5 层/箱； 100 PCS/箱
重量	0.077 kg/PC； 15.75 kg/箱

包装样式图



内包装盒



整箱包装

运输和贮存

1.运输

产品适用车、船、飞机交通运输工具运输。

在运输中，应使用遮蓬进行防雨和防晒，并保持文明装卸，不应有剧烈振动、撞击等。

2.贮存

贮存符合Ⅰ类环境的规定。贮存期限超过6个月的产品建议重新检验，合格后方可使用。

注意事项

- 请由具有专业资格的人员进行调试安装。
- 雷特产品（专有型号除外）不能防水，需避免日晒雨淋，如安装在户外，请用防水箱。
- 良好的散热条件会延长产品的使用寿命，请把产品安装在通风良好的环境。
- 请检查使用的工作电压是否符合产品的参数要求。
- 使用的电线直径大小必须能够负载连接的LED灯具，并确保接线牢固。
- 通电调试前，应确保所有接线正确，以避免因接线错误而导致灯具损坏。
- 如果发生故障，请勿私自维修；如有疑问，请联系供应商。

✱ 本说明书的内容如有变更，恕不另行通知。若内容与您使用的功能有所不同，则以实物为准。如有疑问，请与供应商联系。

保修条例

- 自出厂之日起保修服务期为5年。
- 在保修服务期内出现产品质量问题雷特将给予免费修理或更换服务。

非保修条例：

属下列情况不在免费保修或更换服务范围之内：

- 已经超出保修服务期；
- 过高电压、超负载、操作不当等人为造成的损坏；
- 产品外形严重损坏或变形；
- 自然灾害以及人力不可抗拒原因造成的损坏；
- 产品保修标签和产品唯一条形码损坏；
- 无雷特签订的合同或发票凭证。

1. 修理或更换是雷特对客户的最唯一补救措施。雷特不承担任何附带引起的损害赔偿，除非在适用法律范围之内。
2. 雷特享有修正或调整本保修条款的权利，并以书面形式发布为准。

更新日志

版本	更改日期	更改内容	更改人
A0	2022.11.26	正稿	杨魏玲