

1-10V LED Dimming Driver

0-72W...144W 6A 12-24Vdc


- Dimming interface: 0 -10V ,1 -10V ,10V PWM or push button
- PWM digital dimming, no alter LED color rendering index.
- Dimming range: 0~100%, LED start at 0.1% possible.
- Max. current output: 6A.
- Full protective plastic housing.
- Suitable for indoor environments.




Main Characteristics

Dimming Interface:	0 -10V ,1 -10V ,10V PWM or push button	Working Temperature:	-30℃~55℃
Input Voltage:	12~24Vdc	Product Size:	L135×W30×H20(mm)
Output Voltage:	12~24Vdc	Package Size:	L140×W34×H23(mm)
Output	6A×1CH	Weight(G.W.):	65g
Max. Output Power:	0-72W...144W		
Dimming Range:	0~100%, LED start at 0.1% possible		


Dimensions

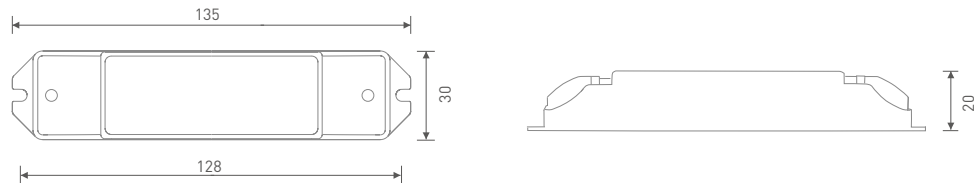


System Connection Diagram:

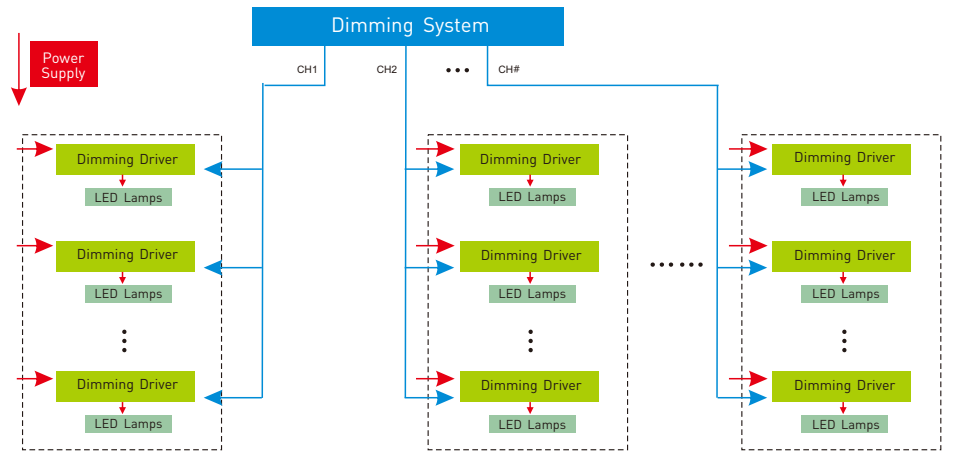


The default design doesn't support the 1-10V and push dimming that work together, if you want them to work together, please mark down when placing a order.

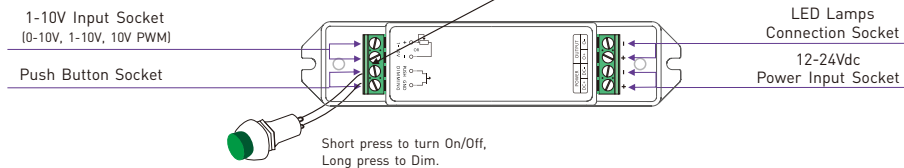

12V lamp connected, loads 0~72W(12V).

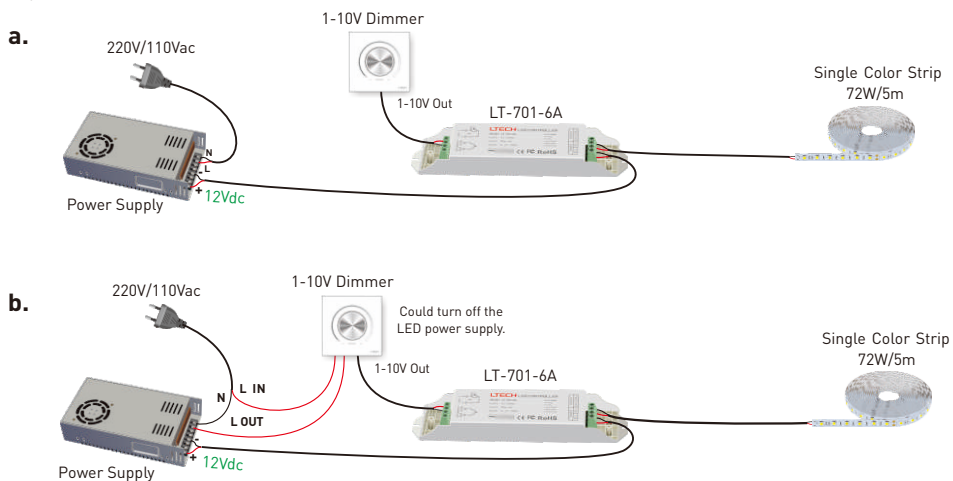

24V lamp connected, loads 0~144W(24V).

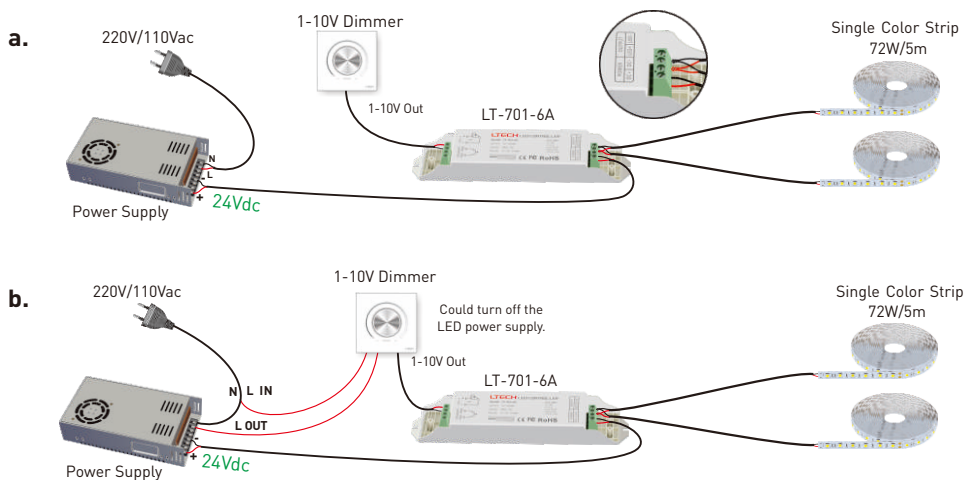

1-10V LED调光驱动器

0-72W...144W 6A 12-24Vdc


- 调光接口：0-10V, 1-10V, 10V PWM或按钮
- PWM数字调光，不改变LED的显色指数
- 调光范围: 0~100%, LED从0.1%开始调光
- 最大可支持 6A 电流输出
- 全防护塑胶外壳
- 适合室内LED照明环境应用




产品参数


调光接口:	0-10V, 1-10V, 10V PWM或按钮	调光范围:	0-100%, LED从0.1%开始调光
输入电压:	12~24Vdc	工作温度:	-30℃~55℃
输出电压:	12~24Vdc	产品尺寸:	L135×W30×H20(mm)
输出:	6A×1路	包装尺寸:	L140×W34×H23(mm)
输出功率:	0-72...144W	重量(毛重):	65克

尺寸图

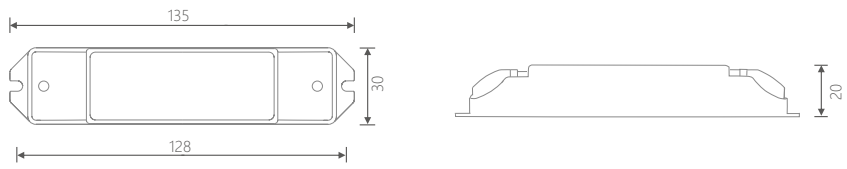


系统连接图

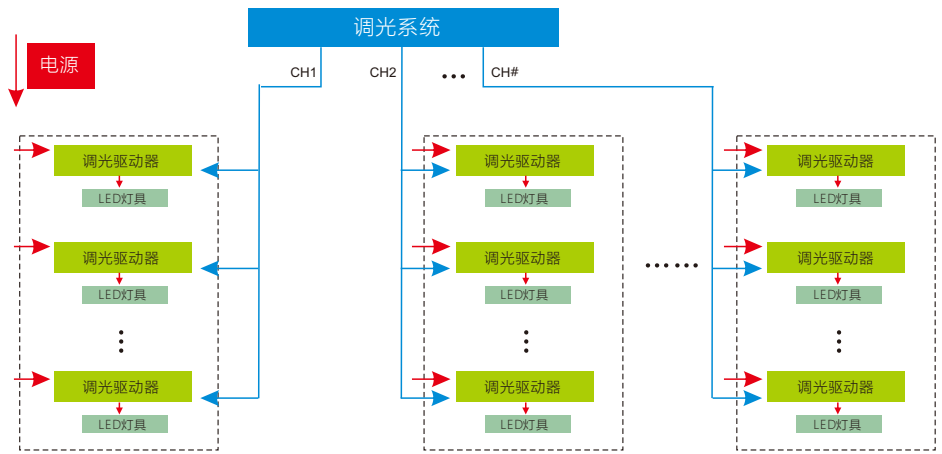

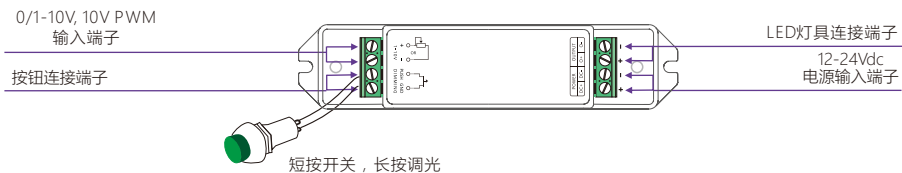

连接12V LED灯具, 可负载0~72W(12V)。

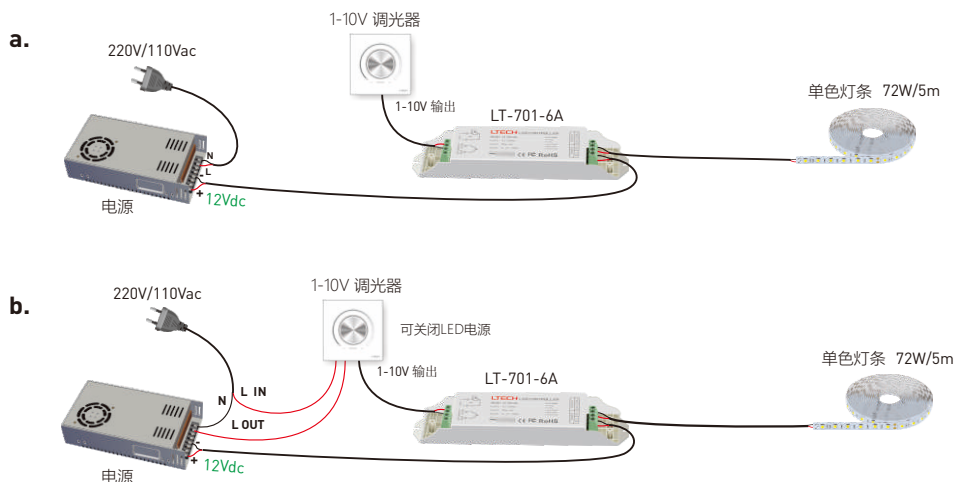

连接24V LED灯具, 可负载0~144W(24V)。

